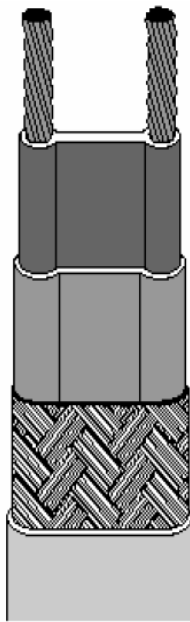

TECHNICAL DATA SHEET

ELEKTRA SelfTec selfregulating heating cable

Construction



1. Core Cu 0,6 mm²
2. Selfregulating conductive core
3. Insulation made of modified polyolefin
4. Tinned copper braid
5. Modified polyolefin outer jacket

Power output (W/m) at 5 °C		16
Supply voltage (V)		230
Minimum bending radius (mm)		10
Maximum exposure temperature (°C)	Intermittent	85
	Continuous	65
Minimum installation temperature (°C)		-20
Maximum dimensions	Thickness (mm)	6,0
	Width (mm)	8,5
Outer jacket colour		black